


VEXSIS INSTRUCTION SHEET

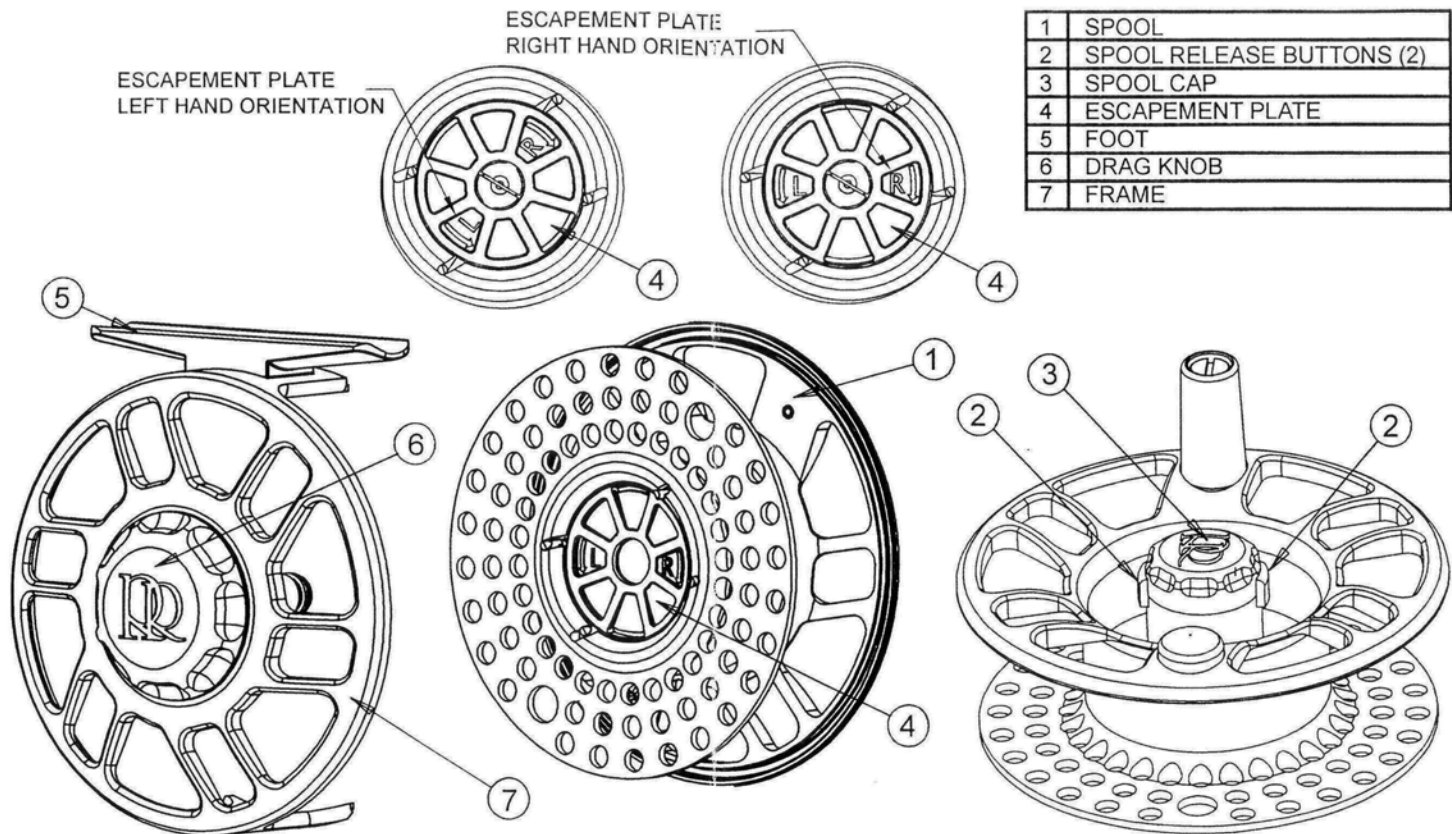

Cleaning

The Vexsis series is fully anodized, making it ideal for use in both freshwater and saltwater. We recommend that you clean your reel after each use, especially after exposure to a salt or alkali environment.

When cleaning the reel, the drag must be fully disengaged - Drag Knob (6) rotated counterclockwise until the stopping position is reached. Use fresh water to flush salt and debris from the drag system. For better cleaning results, separate the Spool (1) from the Frame (7), soak both in warm fresh water and then rinse in fresh running water. Completely dry the Spool (1) and the Frame (7) before storing the reel.

Spool Removal and Replacement

The Spool (1) can be removed from the Frame (7) by simultaneously pressing the two Spool Release Buttons (2) located on the outer edge of the Spool Cap (3) and then pulling the Spool (1) away from the Frame (7). To reinstall the Spool (1) place the Spool (1) onto the spindle and move the Spool (1) towards the Frame (7). The MagnaLock™ spool connection system will lock the Spool (1) onto the frame.

Lubrication

Do not lubricate this reel. Lubricants will degrade the drag system's performance or make it inoperable. This reel uses a permanently lubricated bearing surface and therefore does not need additional lubrication.

Changing the Direction of the Retrieve

1. Remove the Spool (1) from the Frame (7).
2. The direction of retrieve is changed by rotating the Escapement Plate (4) clockwise for right hand retrieve and counterclockwise for left hand retrieve. Rotate the Escapement Plate (4) approximately 80 degrees in the desired direction until it comes to a complete stop.

NOTE - When changing the direction of the retrieve, the direction in which the backing and line are wound onto the Spool (1) must be reversed. When viewing the outer face of the Spool (1), the backing and line should be wound on in a clockwise direction for left hand retrieve and in a counterclockwise direction for right hand retrieve.

Vexsis Specifications

	1	1.5	2	3	4
Width (spool):	0.90"	0.90"	0.95"	1.00"	1.10"
Diameter:	3.00"	3.125"	3.25"	3.50"	3.75"
Weight:	4.5 oz.	4.6 oz.	4.7 oz.	5.2 oz.	6.0 oz.
Line Weights:	2-4 wt.	3-5 wt.	4-6 wt.	5-7 wt.	7-9 wt.
Capacity:	WF3+75	WF4+100	WF5+125	WF6+175	WF8+200

All capacity numbers are in yards. Line capacities are based on floating fly lines and 20# backing. Capacities will vary according to specific length and diameters of alternative line manufacturers' products. Capacities will be reduced by approximately 20% if using #30 backing instead of #20 backing.