





EVOLUTION LTX PRODUCT CARE



CHANGING THE DIRECTION OF RETRIEVE

1. Remove the Spool (1) from the Frame (2) by pushing the Spool (1) out from the back of the Frame (2).
2. Using a #0 Phillips screwdriver, remove at least two of the three Escapement Screws (3) on the inside of the Spool (1).
3. Remove the Escapement Ring (4), turn it over, and replace it on the Spool (1). Align the Escapement Ring (4) screw holes with the Spool (1) screw holes. For left hand retrieve, the escapement pawls should point counterclockwise. For right hand retrieve, the escapement pawls should point clockwise.
4. Reinsert and tighten the Escapement Screws (3)
5. Replace the Spool (1) on the Frame (6).

NOTE - IF WINDING LINE ON THE SPOOL USING A POWER LINE WINDER, REMOVE THE ESCAPEMENT RING (4) PRIOR TO MOUNTING ON THE WINDER.

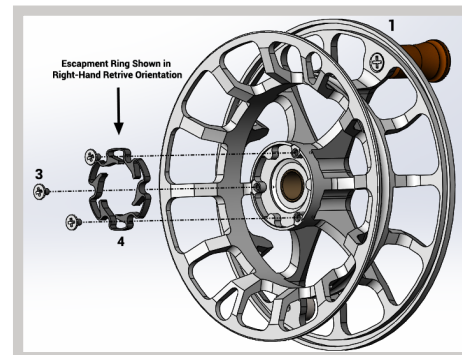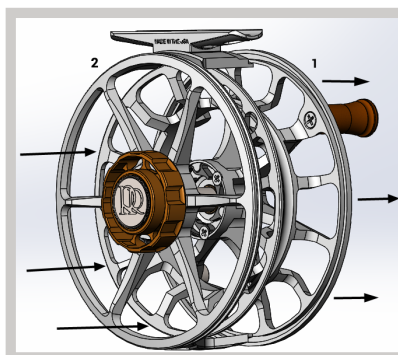

SPECIFICATIONS

All capacity numbers are in yards. Line capacities are based on floating fly lines and 20# backing. All numbers are conservative. Capacities will vary according to specific length and diameters of alternative line manufacturers' products. Capacities will be reduced by approximately 20% if using #30 backing instead of #20 backing.

SIZE	3 4	4 5	5 6	7 8
WIDTH	0.97"	0.97"	0.97"	0.97"
DIAMETER	3.42"	3.48"	3.83"	4.03"
WEIGHT	4.20 oz.	4.29 oz.	4.65 oz.	4.91 oz.
LINE WEIGHT	3-4wt.	4-5wt.	5-6wt.	7-8wt.
CAPACITY	WF3+60 WF4+50	WF4+85 WF5+70	WF5+115 WF6+95	WF7+175 WF8+150

CLEANING

The Evolution LTX series is fully anodized, making it ideal for use in both freshwater and saltwater. We recommend that you clean your reel after each use, especially after exposure to a salt or alkali environment. When cleaning the reel, the drag must be fully disengaged with the drag knob rotated counterclockwise until the stopping position is reached. Use fresh water (distilled water is preferred) to flush salt and debris from the reel. The Escapement Ring (4) can also be removed from the Spool (1) for more thorough cleaning. For better cleaning results, separate the Spool (1) from the Frame (2), soak both in warm fresh water and then rinse in fresh running water. Before storing, let the Spool (1) and Frame (2) completely dry by placing the drag knob up and the spool face up on a flat surface.

NO LUBRICATION IS NECESSARY

REMINDER!!! Do not lubricate this reel. Lubricants will degrade the drag system's performance or make it inoperable. This reel uses a permanently lubricated bearing surface and therefore does not need additional lubrication.