



SAN MIGUEL PRODUCT CARE




CHANGING THE DIRECTION OF RETRIEVE

1. Remove the Spool (2) from the Frame (3) by pressing the stainless Release Button on the spool (1) down while pulling the Spool (2) away from the Frame (3). Be sure to press the Release Button (1) straight down for best results.
2. On the reverse side of the spool, remove the Clutch Cover (4) from the spool by unscrewing it counterclockwise until released.
3. Remove the Clutch Bearing (5). If it does not immediately slide out of the Spool (2), gently tap on a firm surface until the Clutch Bearing (5) comes out. Flip it over and re-insert into the Spool (2). Screw the combined unit back onto the spool by turning clockwise.

Please note: The Clutch Bearing (5) has writing on one side. If this side is facing down towards the Spool (2), this is right-hand retrieve orientation. If the writing is facing up towards the Clutch Cover (4), this is the left-hand retrieve orientation.

4. Reinstall the Spool (2) on the Frame (3).

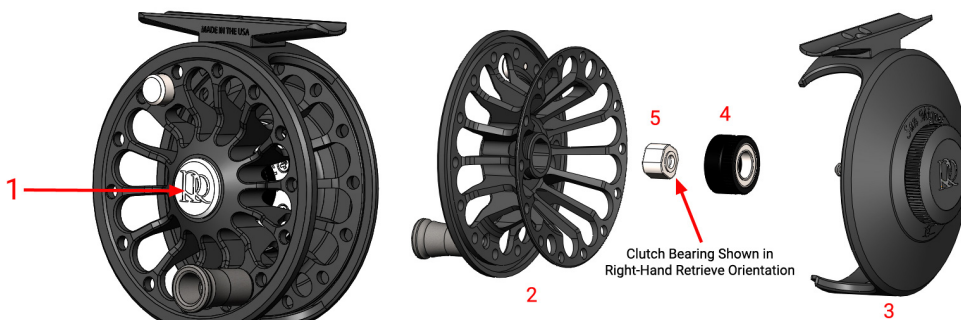

SPECIFICATIONS

All capacity totals are in yards. Line capacities are based on floating fly lines and 20# backing. All numbers are conservative. Capacities will vary according to specific length and diameters of alternative line manufacturers' products. Capacities will be reduced by approximately 20% if using #30 backing instead of #20 backing.

SIZE	3 4	4 5	5 6
WIDTH	0.88"	0.88"	0.88"
DIAMETER	2.95"	3.27"	3.52"
WEIGHT	5.40 oz.	5.80 oz.	6.00 oz.
LINE WEIGHT	3-4wt.	4-5wt.	5-6wt.
CAPACITY	WF3 + 65 WF4 + 50	WF4 + 90 WF5 + 75	WF5 + 100 WF6 + 80

NOTE - When changing the direction of the retrieve, the direction in which the backing and line are wound onto the Spool (2) must be reversed. When viewing the outer face of the Spool (2), the backing and line should be wound on in a counterclockwise direction for left hand retrieve and in a clockwise direction for right hand retrieve.

CLEANING

The San Miguel series is fully anodized, making it ideal for use in both freshwater and saltwater. We recommend that you clean your reel after each use, especially after exposure to salt or alkali environments. When cleaning the reel, the drag must be fully disengaged with the drag knob rotated counterclockwise until the stopping position is reached. Use fresh water (distilled water is preferred) to flush salt and debris from the reel. For best cleaning results, separate the Spool (2) from the Frame (3), rinse both in warm fresh or distilled water. Let the Spool (2) and the Frame (3) completely dry by placing the drag knob up and spool face up before storing.

NO LUBRICATION IS NECESSARY

REMINDER!!! Do not lubricate this reel. Lubricants will degrade the drag system's performance or make it inoperable. This reel uses a permanently self-lubricating parts and therefore does not need additional lubrication.